


Single Extended Pins

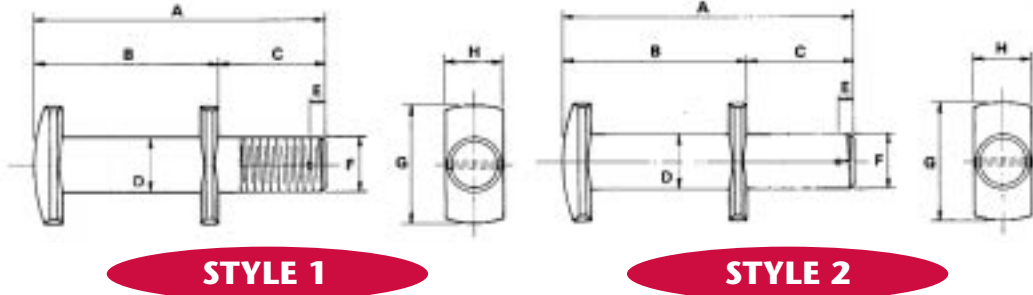

STYLE 1


STYLE 2

| Chain Size | Style | A | B | C* | D | E** | F | G | H | Extension (Diameter-Plain or Threaded) |
|------------|--------|-------------------------------|--------------------------------|--|-------------------------------|------|-------------------------------|---------------------------------|--------------------------------|--|
| X-348 | 1 | B&C | 1 ³ / ₂ | 1-2 | 1/2 | 1/4 | 1/2 | 1 ¹ / ₆ | 1/2 | 1/2" dia. threaded |
| 458/658 | 1 | B&C | 2 ¹ / ₄ | 1 ¹ / ₂ -2 ¹ / ₂ | 3/8 | 1/4 | 1/2 | 1 ¹ / ₂ | 3/8 | 1/2" dia. threaded |
| 458/658 | 1 or 2 | B&C | 2 ¹ / ₄ | 2-5 ¹ / ₂ | 3/8 | 1/4 | 3/8 | 1 ¹ / ₂ | 3/8 | 3/8" dia. threaded or plain |
| 468 | 1 or 2 | B&C | 3 ³ / ₁₆ | 1 ¹ / ₂ -2 ¹ / ₂ | 3/4 | | 3/4 | 1 ¹¹ / ₁₆ | 9 ⁹ / ₁₆ | 3/4" dia. threaded or plain |
| 468 | 1 | B&C | 3 ³ / ₁₆ | 1 ¹ / ₂ -5 ¹ / ₂ | 3/4 | | 3/8 | 1 ¹¹ / ₁₆ | 9 ⁹ / ₁₆ | 3/8" dia. threaded |
| 678 | 1 or 2 | B&C | 3 | 1-3 | 7/8 | 1/4 | 3/8 | 1 ¹ / ₈ | 7/8 | 3/8" dia. threaded or plain |
| 678 | 1 | B&C | 3 | 1-1 ¹ / ₂ | 7/8 | 1/4 | 3/4 | 1 ¹ / ₈ | 7/8 | 3/4" dia. threaded |
| 678 | 1 | B&C | 3 | 1 ¹ / ₂ -2 ¹ / ₄ | 7/8 | | 7/8 | 1 ¹ / ₈ | 7/8 | 7/8" dia. threaded |
| 698/998 | 1 or 2 | B&C | 3 ³ / ₄ | 2 | 1 ¹ / ₂ | 1/2 | 3/4 | 2 ¹ / ₂ | 1 ¹ / ₂ | 3/4" dia. threaded or plain |
| 698/998 | 1 or 2 | B&C | 3 ³ / ₄ | 2 | 1 ¹ / ₂ | 3/16 | 1 ¹ / ₂ | 2 ¹ / ₂ | 1 ¹ / ₂ | 1 ¹ / ₂ " dia. threaded or plain |
| 9118 | 1 or 2 | 7 ³ / ₈ | 4 ⁷ / ₈ | 2 ¹ / ₂ | 1 ³ / ₈ | 1/2 | 1 ¹ / ₈ | 3 | 1 ¹ / ₆ | 1 ¹ / ₈ " dia. threaded or plain |
| 9118 | 1 or 2 | 7 ³ / ₈ | 4 ⁷ / ₈ | 2 ¹ / ₂ | 1 ³ / ₈ | 1/2 | 1 ¹ / ₈ | 3 | 1 ¹ / ₆ | 1 ¹ / ₈ " dia. threaded or plain |

*Pin extension can be altered to meet specific requirements.

**Drilled cotter pin holes available if required.

Coupling Pins and Washers

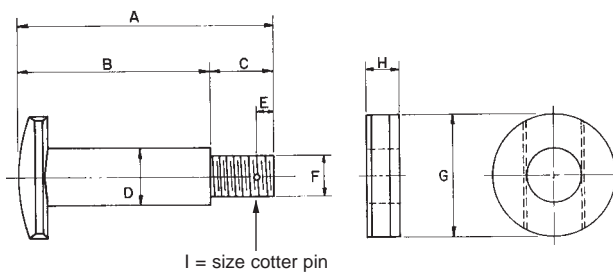

| Size | A | B | C | D | E | F | G | H | I cotter size | Extension(Dia.) | Weight(lbs.) |
|-------|--------------------------------|--------------------------------|--------------------------------|-------------------------------|--------------------------------|-------------------------------|---------------------------------|--------------------------------|------------------|---|--------------|
| X-348 | 2 ⁵ / ₁₆ | 1 ¹ / ₂ | 1 ³ / ₁₆ | 1/2 | 5/32 | 3/8 | 1 | 1 ⁷ / ₆₄ | 1/8 | 3/8" dia. threaded | .20 |
| X-458 | 2 ⁷ / ₈ | 1 ⁵ / ₄ | 6 ³ / ₆₄ | 3/8 | 1 ⁹ / ₆₄ | 1/2 | 1 ¹ / ₄ | 9 ⁵ / ₃₂ | 1/8 | 1/2" dia. threaded | .38 |
| 468 | 3 ³ / ₃₂ | 2 ⁷ / ₈ | 1 ¹ / ₂ | 3/4 | 3/16 | 3/8 | 1 ¹ / ₆ | 2 ⁵ / ₆₄ | 1/8 | 3/8" dia. threaded | .75 |
| X-658 | 2 ⁷ / ₈ | 1 ⁵ / ₄ | 6 ³ / ₆₄ | 3/8 | 1 ⁹ / ₆₄ | 1/2 | 1 ¹ / ₄ | 9 ⁵ / ₃₂ | 1/8 | 1/2" dia. threaded | .38 |
| X-678 | 3 ² / ₃₂ | 2 ¹ / ₁₆ | 3 ¹ / ₃₂ | 7/8 | 1/4 | 3/8 | 1 ¹ / ₈ | 1/2 | 1/8 | 3/8" dia. threaded | .94 |
| 698 | 4 ⁹ / ₆₄ | 3 ¹ / ₁₆ | 1 ¹ / ₄ | 1 ¹ / ₂ | 1 ⁷ / ₆₄ | 3/4 | 2 ¹ / ₈ | 5/8 | 1/8 | 3/4" dia. threaded | 2.00 |
| 998 | 4 ⁹ / ₆₄ | 3 ¹ / ₁₆ | 1 ¹ / ₄ | 1 ¹ / ₂ | 1 ⁷ / ₆₄ | 3/4 | 2 ¹ / ₈ | 5/8 | 1/8 | 3/4" dia. threaded | 2.00 |
| 9118 | 6 ³ / ₃₂ | 4 ³ / ₃₂ | 1 ¹ / ₄ | 1 ³ / ₈ | 1/4 | 1 | 3 | 1 ¹ / ₁₆ | 3/16 | 1" dia. threaded | 4.00 |
| 9148 | 7 ¹ / ₆₄ | 5 ¹ / ₆₄ | 1 ¹ / ₂ | 1 ¹ / ₄ | 1/4 | 1 ¹ / ₂ | 3 ²³ / ₃₂ | 2 ⁵ / ₃₂ | 3/16 | 1 ¹ / ₂ " dia. threaded | 6.50 |



WILMOT
COMPANY, INC.



Call 1-888-5WILMOT
Fax 1-570-443-7594
www.wilmotco.com